

skatepark design and construction



YOUTH'S DREAMS COME TRUE



PROJECT SK 30-14










LxWxH, mm

- 1 BANK 4030x3660x1000
- **EVALUATION EVALUATION EVAL**
- **3 QUARTERPIPE** 3500x3660x1400
- 4000x40x340
- **S KICKER** 1450x1220x300
- 6 MANUAL PAD 3550x1220x200/430
- **GRIND BOX** 3660x600x300

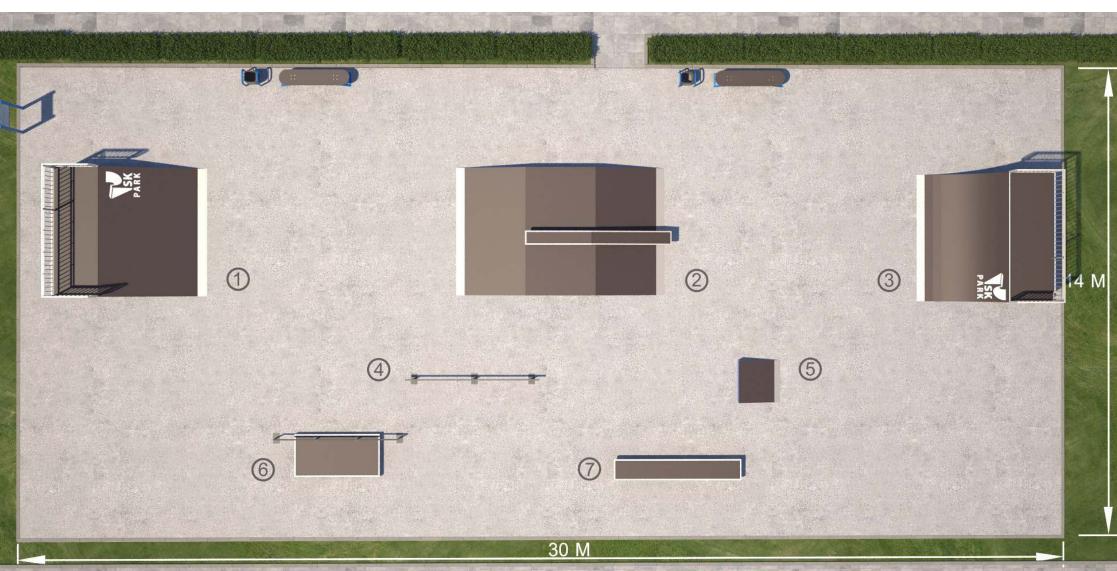

PROJECT SK 30-14

About project:

Project is directed for skateboarding for riders with beginner level. Provided line for learning jumps and sliding basic tricks (Nº4-7). Also equipment can be used by BMX/MTB riders, rollerbladers and kickscooters.

Requirements for area: asphalt/concrete

Primary users:

BMX/MTB, skateboarding, rollerblading, kickscooter

Level: beginners

The average numbers of riders: 11 people

Minimum area size: 30x14 (420 M²)

Warranty – 2 years. Equipment complies GOST 54415-2011(Russian standard). Equipment complies DIN EN 14974(European standard).

More options:

- drawing a logo on the equipment
- colouring of a framework and side panels in any color by RAL

Price and terms you can specify with managers of SKpark company.







METAL FRAME

mobile version of equipment

PLEASE SPECIFY PRICE AND TERMS WITH MANAGERS OF SKPARK COMPANY

Frame

Steel module frame

- Anti-corrosion
 Polymeric-powder coating
 any color according by RAL
- Surface
 Finnish laminated plywood
 Thickness from 12mm
- Side panels (additional option)
 Finnish laminated plywood
 Thickness from 12mm
 any color according by RAL
- Fasteners (rivets, screws) Steel galvanized fasteners

ALL USED MATERIALS ARE CERTIFIED AND HAVE CERTIFICATE OF CONFORMITY







WOODEN FRAME

stationary version of equipment*

PLEASE SPECIFY PRICE AND TERMS WITH MANAGERS OF SKPARK COMPANY

- Frame**
 Smoothed and planed
 Finnish laminated plywood
- **Surface**Finnish laminated plywood
 Thickness from 12mm
- Side panels
 Finnish laminated plywood
 Thickness from 12mm
- Safety hand-rails Steel profile
- Fasteners (rivets, screws)
 Steel galvanized fasteners
- * Required installation specialists
- ** Processing by antiseptic and fire prevention solute.

ALL USED MATERIALS ARE CERTIFIED AND HAVE CERTIFICATE OF CONFORMITY





WOOD VS METALL		WOODEN FRAME	STEEL FRAME
000	DURABILITY	ABOUT 7 YEARS	ABOUT 15 YEARS
0	WARRANTY	2 YEARS	2 YEARS
	NOISE LEVEL	Can be used at inhabited yard	It isn't recommended to use near houses.
	AVERAGE INSTALLATION TIME	Required installation specialists. Average installation time: 3-30 days.	Possibility of installation by yourself, according to the circuit assembly. Average installation time: 1-7 days.
	DISMANTLING	Fixed construction (practically unsuitable for dismantling).	Possible to disassemble and assemble the equipment if it necessary.



119571, Moscow, Leninsky prospect, 158, office 338

tel.: +7 (495) 988-27-38 +7 (985) 820-62-25

MAIL@SKPARK.RU WWW.SKPARK.RU

